

28206 Pumpout Cart 60 Gallon

Design Features

- Marine Grade Aluminum
- Powder Coated
- Tubing Construction
- 1- 7/8" Ball Hitch Receiver
- Integrated Handle/Tow-bar
- Parking Brake
- Aluminum Hose Rack
- 60 Gallon Roto-Molded PE Tank
- 20' Discharge Hose



28206 Pumpout Cart
 (Shown without pump option installed)

General Description

The 28206 (60 gal) Pumpout Cart is an ideal way to provide pump out service throughout the marina without installing plumbing. Boat yards frequently need to pump out a boat either when in dry dock or when pulling the boat for the season. The portable design can be integrated into a plumbing infrastructure to provide a fixed station though out the marina and become portable as needed.

The versatile cart is designed to accept our diaphragm pump options, or the powerful peristaltic options shown below.

Model 25261
 Double Diaphragm



- 3/4hp 120V 1ph *
- 25' Suction Lift
- 25' Discharge Head
- Up to 25 GPM
- Poly Construction

Model 286EP-.75hp
 Compact Peristaltic



- 3/4hp 120V 1ph *
- 27' Suction Lift
- 60' Discharge Head
- Up to 15 GPM
- Marine Grade Aluminum

Model 286EP-1hp
 STD Peristaltic





- 1hp 120V 1ph *
- 27' Suction Lift
- 65' Discharge Head
- Up to 21 GPM
- Marine Grade Aluminum

***Honda gasoline engines also available.**



EDSON Corporation
146 Duchaine Boulevard
New Bedford, MA 02745-1292
(508) 995-9711 Fax: (508) 995-5021

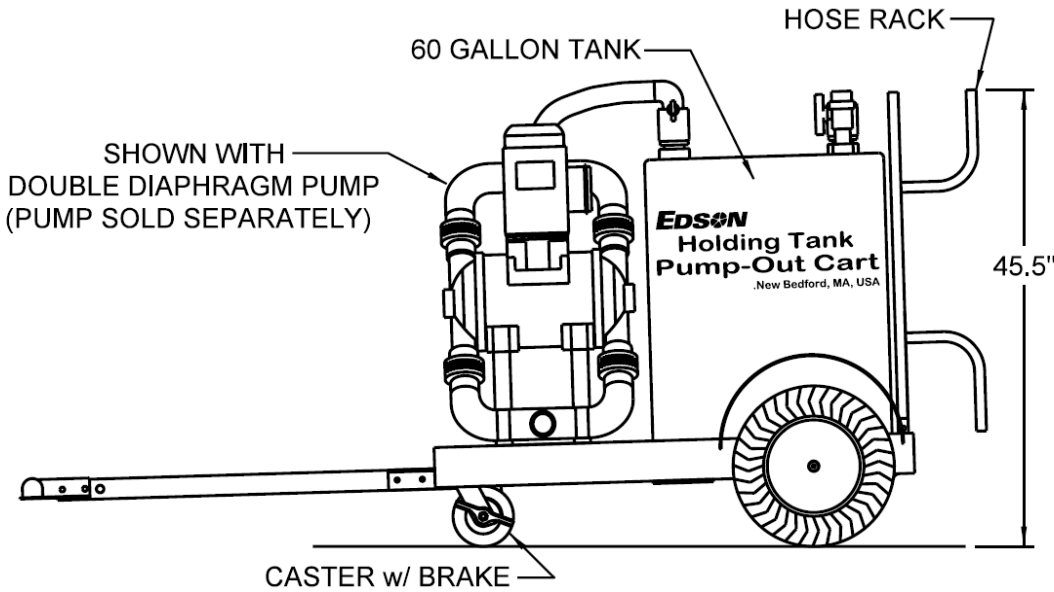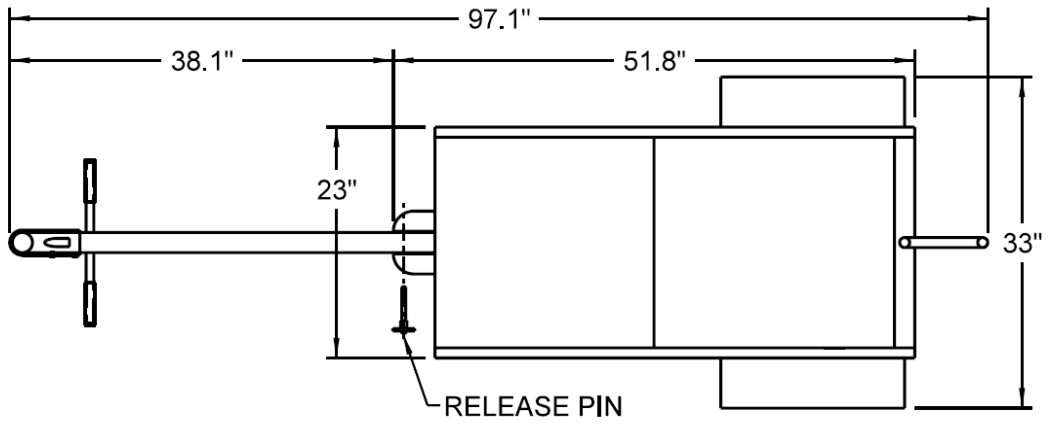

PUMPOUT CART WITH 60 GALLON TANK

28206

www.EdsonPumps.com



261 Pumpout Hose Assemblies



261-25-150
Seen on the left

Standard Length Assemblies

25 ft. Order No. 261-25-150

33 ft. Order No. 261-33-150

50 ft. Order No. 261-50-150

Custom Length Assemblies

5 ft to 100 ft.

The Edson Pump Out Hose (length 25 Ft [picture to the left], 1½" ID x 2" OD, EPDM tube with Polyethylene helix) comes complete with all fittings and adapters including 90° ball valve and sight glass. It's two part construction of smooth inner bore and rugged outer spiral cap provides a pump out hose that is corrosion resistant, extremely flexible, crush-proof, collapse-proof and abrasive resistant. It can be used with any suction pump and at 104 degrees F has a vacuum rating of 28" Hg and pressure rating of 35 psi.

Deck Adapters (Included)



Universal
272QC-150-SG



1½"
273-125



274-150



1½"
273-150

Assembly Components (Included)



262-XX-150



151FF-150NY



158MF-150NY



Clear Check Valve

269CL-150



90° Ball Valve

264-90-150



152FM-150NY

Customers also purchased...

(Not Included)



272QC-150



1½"

160-A-3315-150



90° 1½"

160-A-1023



272TH-150



Portable Hose Handler
#26050

50 ft to 100 ft Assemblies
For Portable Pumpouts



2"

160-A-3315-200



90° 2"

160-A-2008



Hose Stand
#26035

25 ft to 50 ft Assemblies
For Fixed PumpOut
Stations

